

导向轴支座 加厚型·标准型 端部安装型

IHF

加厚型·标准型



系列码			材质		表面处理
圆法兰型	方法兰型	两面切割法兰型	国标	日标	
GK05YF	GK05FF	GK05QF	45	S45C	发黑
GK05YN	GK05FN	GK05QN	0Cr18Ni9	SUS304	无电解镀镍
GK05YU	GK05FU	GK05QU	LD30	A6061	喷细砂本色阳极氧化
GK05YW	GK05FW	GK05QW			黑色阳极氧化
GK05YB	GK05FB	GK05QB			

圆法兰型






方法兰型

两面切割法兰型

D8~10

D12~50

6.3 (1.6)



△ 棱边倒钝C0.5

型式				固定部壁厚 (T ₁)	L	D ₁	H	T	G	P	K	W	P ₁	F	d	M (粗牙螺纹)			
①系列码		②D _{H7}																	
圆法兰型	方法兰型	8	+0.015 0	3.5	16	15	32	5	10	25	25	15	25	-	3.5	M3			
	GK05YF	GK05FF	10		5	20	20		38	12	30	30	20	30			4.5		
	GK05YN	GK05FN	12		5	24	22		40	15	32	32	25		16		4.5		
	GK05YU	GK05FU	13	+0.018 0	5.5	26	24	42	6	16	34	34	27	28	18	5.5	M4		
	GK05YW	GK05FW	15				30	26		48	18	38	38					29	32
	GK05YB	GK05FB	16				6	32		28	50	19	40					39	32
	两面切割法兰型		20	+0.021 0		32	35	63	8	20	50	48	40	42	25		M5		
GK05QF		25			7.5		40	68		23	55	53	45	45	30	6.5			
GK05QN		30				38	45	73		10	24	60	58	50	48	35			M6
GK05QU		35			10		55	89	10		72	70	61	58	42		M6		
GK05QW		40	+0.025 0		15	50	70	104	12	30	87	80	76	68	54	9	M8		
GK05QB		50						80		114		97	90	86	73	64			





15

导向轴支座

端部安装型



系列码		材质		表面处理
圆法兰型	两面切割法兰型	国标	相当	
GK07YF	GK07QF	45	S45C	发黑
GK07YN	GK07QN			无电解镀镍

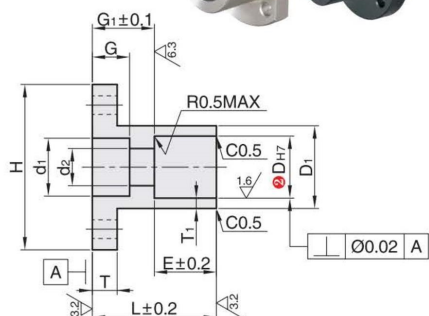

△ 棱边倒钝C0.5

型式		固定部壁厚 (T1)	L	D1	H	T	G	G1	E	P	W	P1	F	d	d1	d2	安装螺栓
①系列码	②DH7																
圆法兰型	8	+0.015 0	16	12	28	5	4.5	6	10	20	16	20		3.5	8	4.5	M4
方法兰型	10		2	20	14	30		5.5	8	12	18	22			9.5	5.5	M5
GK07YF	GK07FF	12	2	24	16	36		6.5	9	15	26	20	28		11	6.6	M6
GK07YN	GK07FN	15	2.5	30	20	40	6	9	15	15	30	24	30	4.5	14	9	M8
两面切割法兰型	16		3	32	22	42		16	16	32	26	28	16		18	11	M10
GK07QF		+0.021 0	4	46	33	55	8	13	23	23	44	37	36	24	20	13	M12
GK07QN				58	38	66		30	28	52	42	41	27	6.6	26	17	M16
	40	+0.025 0	7	70	54	88	10	17	30	40	72	62	62	38	9		

选型举例
Sample Order

①系列码	②D
GK05YF	D8
GK05QF	D12

选型举例
Sample Order

①系列码	②D
GK07YF	D8
GK07QF	D10