

无油衬套 直柱型/肩型


聚脞醛树脂/聚四氟乙烯树脂

IHF


聚脞醛树脂



直柱型 ZE22AA

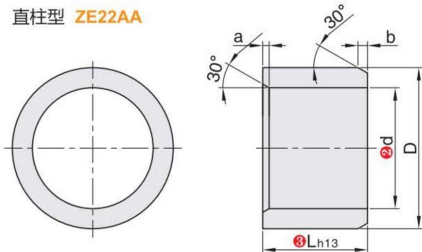

肩型 ZE22BA

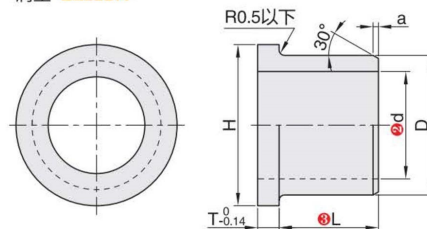

系列码	类型	材质	耐热温度
ZE22AA	直柱型	聚脞醛树脂	-40~80℃
ZE22BA	肩型	含润滑油剂与特殊填充剂	

△ 本产品为注塑品，表面存在凹点(注塑水孔)为正常现象，不影响使用。
△ 于本产品相配固定座直径公差：H7；轴径公差：h9(仅供参考)。

△ L≤10时，公差L_{0.3}，L>10时，公差L_{0.5}。

直柱型

型式	①系列码	②d	③L	D	倒角
ZE22AA	3	+0.054 +0.014	3 5 6	4.5	0.3
	4	+0.068 +0.020	4 6 8	5.5	
	5		5 8 10 12 18	7	
	6		4 5 6 8 10 11	8	
	8		5 6 8 10 11 12 15	10	0.5
	10	+0.083 +0.025	4 5 6 8 10 12 15 18 20	12	
	10A		10 16	14	
	12		6 8 10 12 15 20 25 30	14	
	14		8 10 12 15 20 25	16	0.8
	15	+0.102 +0.032	10 12 15 17 20 25	17	
	16		10 12 15 20 25	18	
	18		15 20 25	20	
	20		12 15 28	22	1.2
	20A		10 15 20 23 25 30	23	
	22	+0.124 +0.040	15 20 25 30	25	
	25		10 12 15 20 25 30	28	
	30		20 25 30 40	34	
	35		15 20 25 30 40 50	39	
	40	+0.150 +0.050	20 30 40 50	44	
	45		30 40 50	50	
	50		10 20 30 40 50	55	

△ d公差为压入标准H7座孔(ISO3547-1)后公差。

肩型


型式	①系列码	②d	③L	D	H	T	倒角
ZE22BA	3	+0.054 +0.014	2.25 4.25	4.5	7.5	0.75	0.3
	4	+0.068 +0.020	2.25 5.25	5.5	9.5	0.75	0.3
	5		3 4	7	11		0.3
	6		3 4 5 7 9	8	12		0.3
	8	+0.083 +0.025	4.5 5 6.5 8.5 9 11	10	15		0.3
	10		4 5 6 7 8 9 11 14 16	12	18		0.5
	12		3 4 5 6 8 9 11 12 14 16 17 19	14	20	1	0.5
	14		4.2 7 9 11 16	16	22		
	15	+0.102 +0.032	8 11 14 16 19 24	17	23		
	16		11 16	18	24		
	18		11 16 19	20	26		0.8
	20		10 15 20	23	30		
	22	+0.124 +0.040	10	25	33	1.5	
	25		10 15 20	28	35		
	30		7 14 24 30 35	34	42	2	
	35		14 24	39	47		
	40	+0.150 +0.050	28 38	44	52	2	1.2
	45		23 43 48	50	58		
	50		18 28 38 48	55	63		

△ d公差为压入标准H7座孔(ISO3547-1)后公差。


聚四氟乙烯树脂



直柱型 ZE23AA

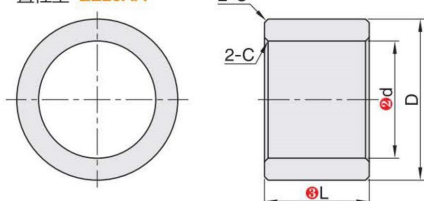

肩型 ZE23BA

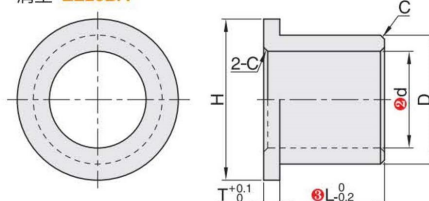

系列码	类型	材质	耐热温度
ZE23AA	直柱型	聚四氟乙烯树脂	-200~200℃
ZE23BA	肩型	含润滑油剂与特殊填充剂	

△ ZE23AA: L≤8时，公差L_{0.2}，L>8时，公差L_{0.25}。
△ 于本产品相配固定座直径公差：H7；轴径公差：g6(仅供参考)。

型式	①系列码	②d	③L	D	压入后 内径公差	H	T	C
直柱型 ZE23AA	3	+0.179 +0.129	3 5	6	+0.120 +0.070	9		
	4		3 5 8	7	+0.090 +0.040	9	1.5	0.3
	5		5 8 10	8		11		
	6	+0.182 +0.132	5 8 10	9	+0.125 +0.075	12		
肩型 ZE23BA	8	+0.197 +0.147	8 10 12 15	12	+0.131 +0.081	16		
	10	+0.210 +0.160	8 10 12 15	14	+0.144 +0.094	18	2	0.5
	12	+0.212 +0.162	10 12 15 20	16	+0.146 +0.096	20		
	16	+0.239 +0.189	12 15 20 25	22	+0.175 +0.105	28	3	
	20	+0.303 +0.183	15 20 25 30	26	+0.110 +0.060	32	3	0.8

选型举例
Sample Order

①系列码	②d	③L
ZE22AA	d3	L6
ZE23AA	d3	L5