


测角仪滑台 α 轴 燕尾槽式

iHF




ZD66AR-40-25

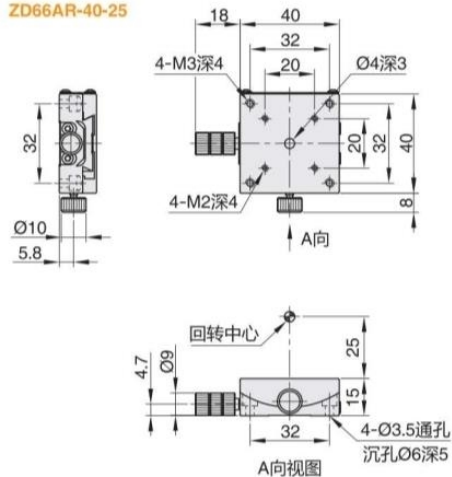


注意事项:

安装于滑台底面或顶面的零件平面度不足时,可能无法发挥出产品应有的性能。(平面度的参考标准: $10\mu\text{m}$ 以内)


ZD66AR-40-40

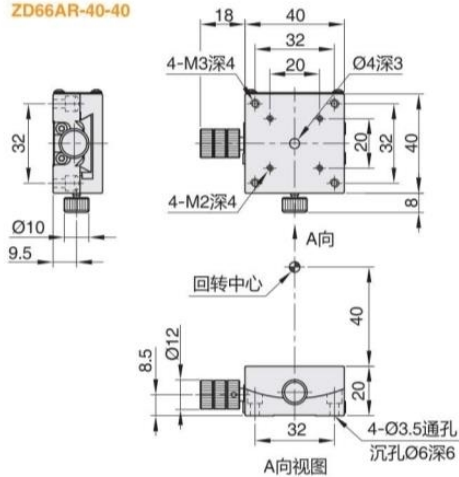


ZD66AR-40-60

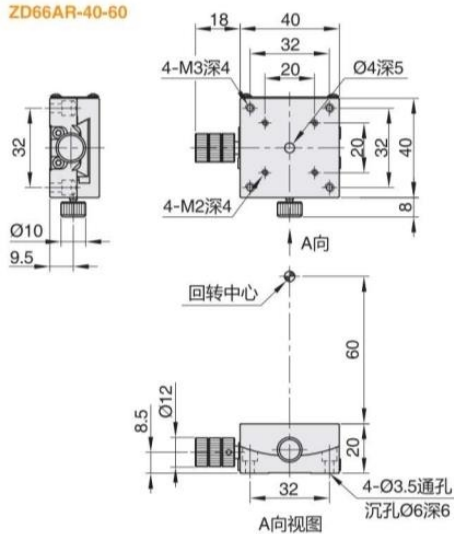


ZD66AR-50-50

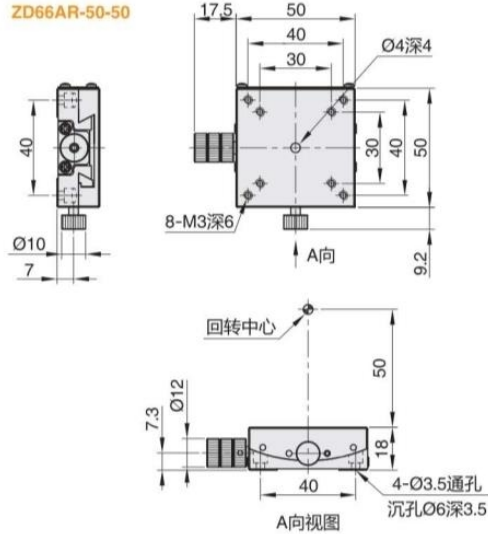

ZD66AR-50-68

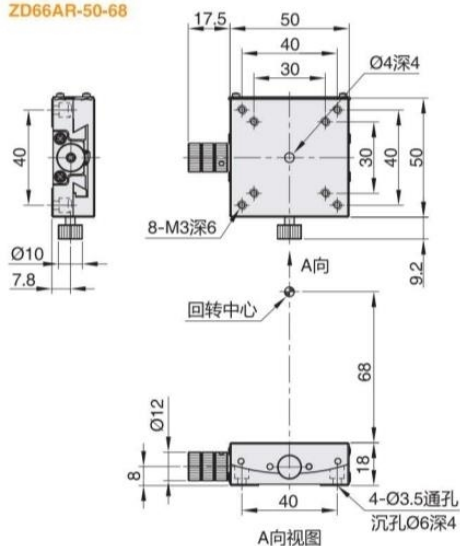

ZD66AR-60-35

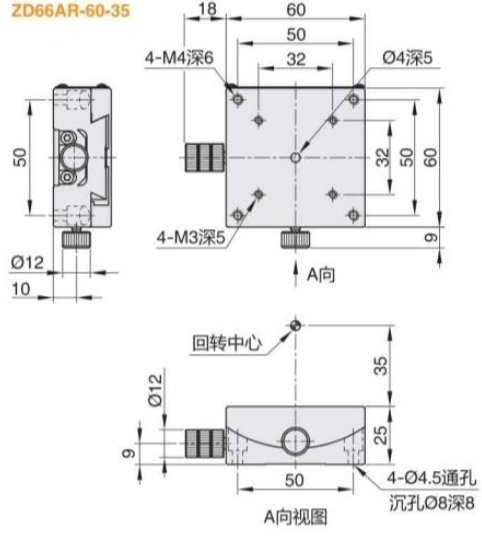


08
简易
调整
组件
滑台


测角仪滑台 α 轴 燕尾槽式

iHF

ZD66AR-60-60

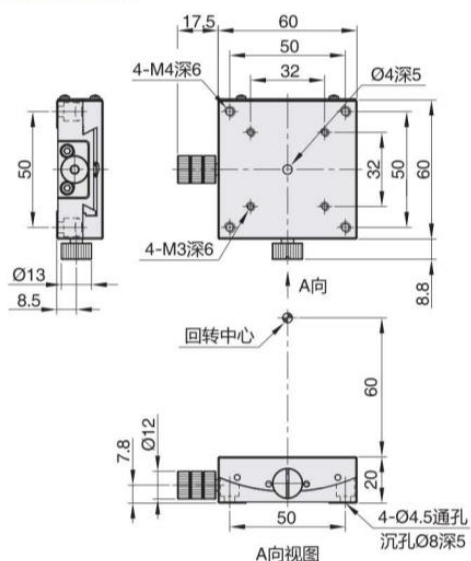

ZD66AR-60-80

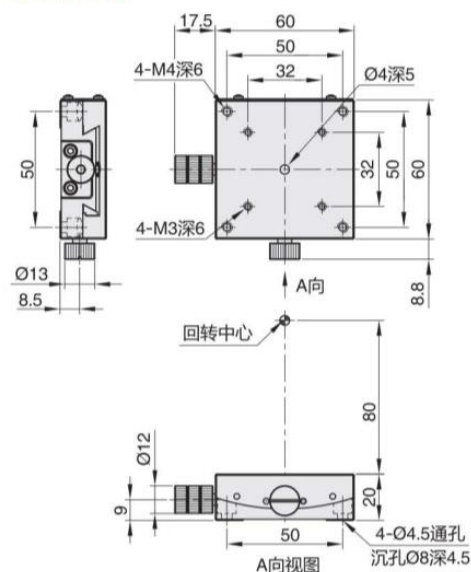

型式					滑台面 (mm)	移动量	标尺刻度 最小读取量	把手回转 一圈移动量	承重 (kgf)	自重 (kg)
❶系列码	材质	表面处理	❷规格	❸中心高度(mm)						
ZD66AR	铜合金	黑色氟树脂 处理	40	25	40×40	±20°	0.1°	2.2°	3	0.18
				40		±15°		1.89°		0.24
				60		±10°		1.33°		0.24
			50	50	50×50	±10°		1.58°	3	0.45
				68				1.21°		0.45
				35				2.0°		0.69
			60	60	60×60	±20°		1.31°	5	0.69
				80				1.02°		0.8

选型举例
Sample Order

①系列码	②规格	③中心高度
ZD66AR	40	25
ZD66AR	50	50

08 简易调整
滑台 组件