

凸轮随动器 重载型

iHF




圆柱型D公差

D	公差
10~16	$\begin{smallmatrix} 0 \\ -0.008 \end{smallmatrix}$
19~30	$\begin{smallmatrix} 0 \\ -0.009 \end{smallmatrix}$
32~47	$\begin{smallmatrix} 0 \\ -0.011 \end{smallmatrix}$
52~80	$\begin{smallmatrix} 0 \\ -0.013 \end{smallmatrix}$


△ 圆弧型D公差: $\begin{smallmatrix} 0 \\ -0.05 \end{smallmatrix}$

系列码		材质	外形
不带密封圈	带密封圈		
CA76AS	CA76BS	SUJ2	圆柱型
CA76AH	CA76BH	SUS440C	圆柱型
CA76CS	CA76DS	SUJ2	圆弧型
CA76CH	CA76DH	SUS440C	圆弧型


圆柱型•不带密封圈型
CA76AS/CA76AH

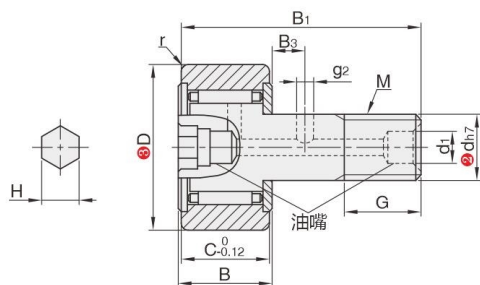


圆柱型•带密封圈型
CA76BS/CA76BH

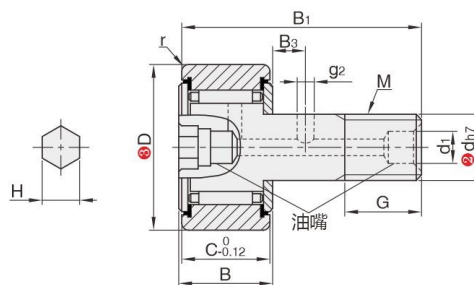

圆弧型•不带密封圈型
CA76CS/CA76CH

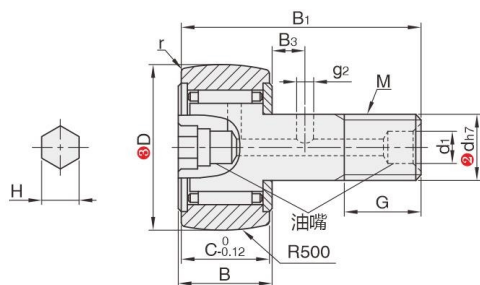

圆弧型•带密封圈型
CA76DS/CA76DH

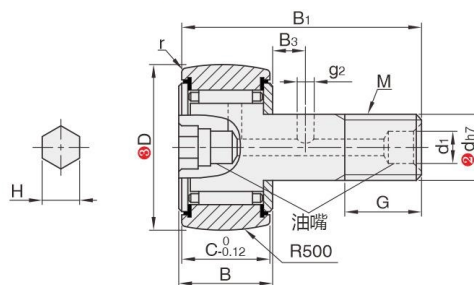

△ 使用环境温度80℃以下

型式		⑧D	M×螺距	C	B	B1	G	B3	g2	d1	H	r	D1 (最小)	基本额定负载		最大容许 负载(kN)	轨道负载容量(kN)		极限转速(krpm)	
①系列码	②d dh7容差													C(动)kN	Cor(静)kN		圆弧型	圆柱形	带密封圈型	无密封圈型
不带密封圈	3	$\begin{smallmatrix} 0 \\ -0.010 \end{smallmatrix}$	10	3×0.5	7	8	17	5			2	0.3	6.8	2.5	2.61	0.5	0.56	1.36	25000	35700
	4	$\begin{smallmatrix} 0 \\ -0.012 \end{smallmatrix}$	12	4×0.7	8	9	20	6			2.5		8.6	3.5	3.8	0.92	0.72	1.79	19000	27100
	5	$\begin{smallmatrix} 0 \\ -0.012 \end{smallmatrix}$	13	5×0.8	9	10	23	7.5			3	0.5	9.7	4.5	5.3	1.64	0.8	2.22	15000	21400
	6	$\begin{smallmatrix} 0 \\ -0.015 \end{smallmatrix}$	16	6×1.0	11	12	28	9			3		11	4.9	6.5	2.11	1.08	3.4	3800	5400
	8	$\begin{smallmatrix} 0 \\ -0.015 \end{smallmatrix}$	19	8×1.25			32	11			4		13	5.4	7.9	4.73	1.37	4.05	3100	4400
带密封圈	10	$\begin{smallmatrix} 0 \\ -0.015 \end{smallmatrix}$	22	10×1.25	12	13	36	13			5	1	15	6.2	9.1	5.81	1.67	5.15	2600	3700
	10	$\begin{smallmatrix} 0 \\ -0.018 \end{smallmatrix}$	26	12×1.5	14	15	40	14	6	4			20	7.3	11.3	9.37	2.06	6.1		
	12	$\begin{smallmatrix} 0 \\ -0.018 \end{smallmatrix}$	30	12×1.5	14	15	40	14	6	4			20	9.5	14.6		2.62	7.7	2100	3000
	12	$\begin{smallmatrix} 0 \\ -0.018 \end{smallmatrix}$	32	16×1.5	18	19.5	52	18	3	6	1.5		24	12.8	23	17.3	3.2	11.9	1600	2300
	16	$\begin{smallmatrix} 0 \\ -0.021 \end{smallmatrix}$	35	18×1.5	20	21.5	58	20	8	6			26	14.8	26.5	2.61	3.85	14.5	1400	2000
	18	$\begin{smallmatrix} 0 \\ -0.021 \end{smallmatrix}$	40	20×1.5	24	25.5	66	22	9	4	8	8	36	22.6	48	32.1	7.65	23.3	1300	1800
	20	$\begin{smallmatrix} 0 \\ -0.021 \end{smallmatrix}$	52	20×1.5	24	25.5	66	22	9	4	8	8	36	22.6	48	32.1	7.65	23.3	1300	1800
	20	$\begin{smallmatrix} 0 \\ -0.021 \end{smallmatrix}$	52	20×1.5	24	25.5	66	22	9	4	8	8	36	22.6	48	32.1	7.65	23.3	1300	1800

△ d小于12时, 只有头部六角安装孔, 无油脂补充孔。

选型举例
Sample Order

①系列码	-	②d	-	⑧D
CA76CS	-	d3	-	D10
CA76DS	-	d4	-	D12

△ 此颜色为2025版画册变更数据。