



简易调整组件 X轴·标准型·厚度10 进给丝杠型

IHF




系列码	类型	厚度	主体		导向轴	旋钮	材质	
			材质	表面处理	材质	材质	进给丝杠	丝杠螺母
ZD80AB	标准型	10	A6063	黑色 阳极氧化	SUS304	SUS303	SUS304	黄铜
ZD80BB								


规格: 20

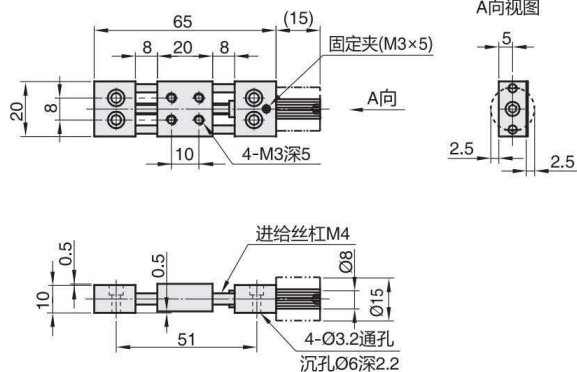


规格: 25

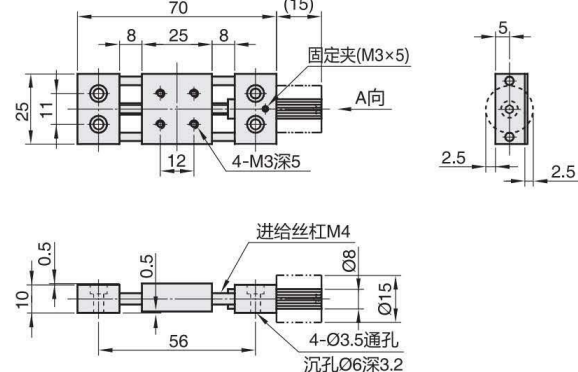


规格: 40

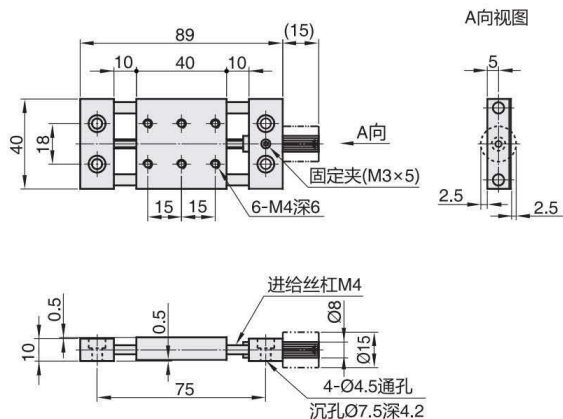


规格: 40A

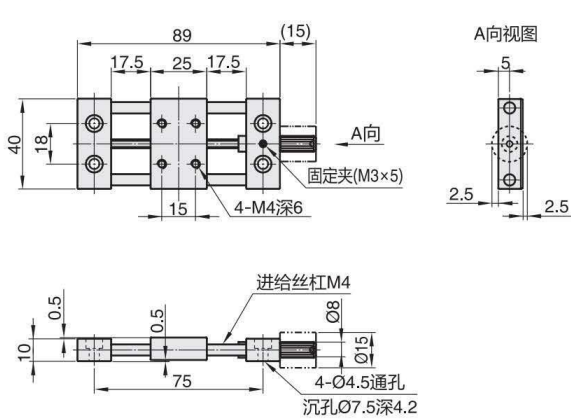

规格: 60

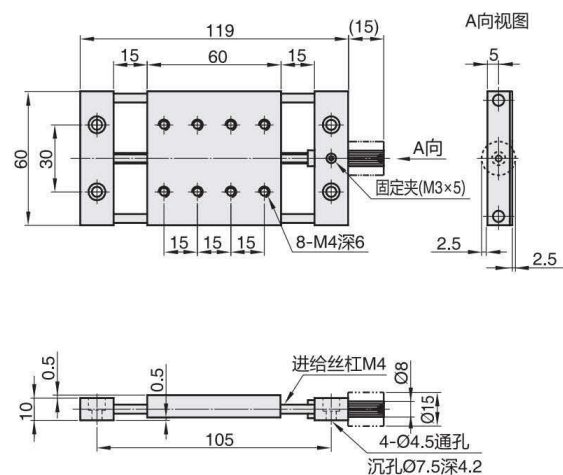


规格: 60A

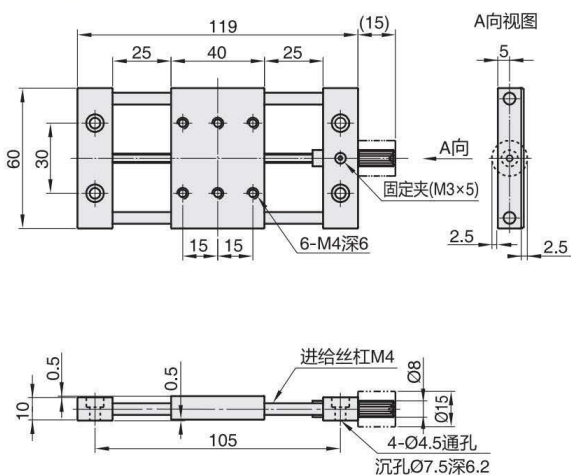

简易调整组件 X轴·标准型·厚度10 进给丝杠型


iHF

规格: 60B

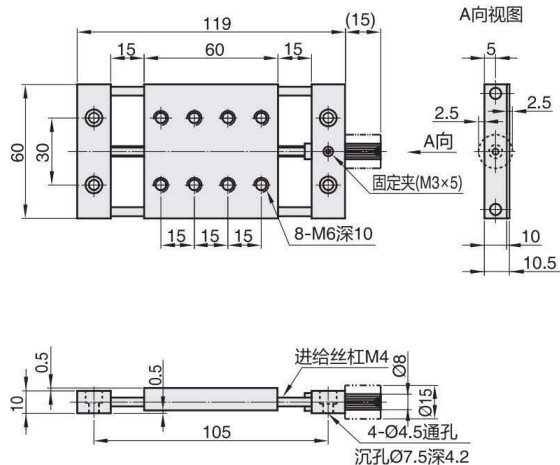


旋钮


普通旋钮



大旋钮



精度基准

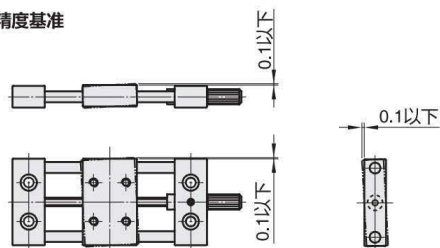

⚠ 不适用于精密定位。

型式		滑台面 (mm)	行程 (mm)	耐负载 (N)		旋钮旋转1圈 移动量(mm)	自重(kg)	附件(4个)
①系列码	②规格			水平	垂直			
普通旋钮型 ZD80AB	20	20×20	±7	19.6	9.8	0.7	0.039	不锈钢内六角圆柱头螺钉BM01CU-M3-L12
	25	25×25	±7				0.049	不锈钢内六角圆柱头螺钉BM01AU-M3-L12
	40	40×40	±9				0.104	
大旋钮型 ZD80BB	40A	40×25	±17			0.7	0.091	
	60	60×60	±13	39.2	19.6		0.176	不锈钢内六角圆柱头螺钉BM01AU-M4-L12
	60A	60×40	±23				0.147	
	60B	60×60	±13				0.176	

选型举例
Sample Order

①系列码	②规格
ZD80AB	20
ZD80AB	25

08
简易调整组件
滑台