


导向轴支座 T型开口型 标准型

iHF



系列码	材质		表面处理	附件
	国标	日标		
GK20BF	45	S45C	发黑	1个内六角圆柱头螺钉(发黑)
GK20BN			无电解镀镍	
GK20BU	0Cr18Ni9	SUS304	-	1个内六角圆柱头螺钉(不锈钢)
GK20BW	LD31	A6063	喷细砂本色阳极氧化	1个内六角圆柱头螺钉(发黑)
GK20BB			黑色阳极氧化	

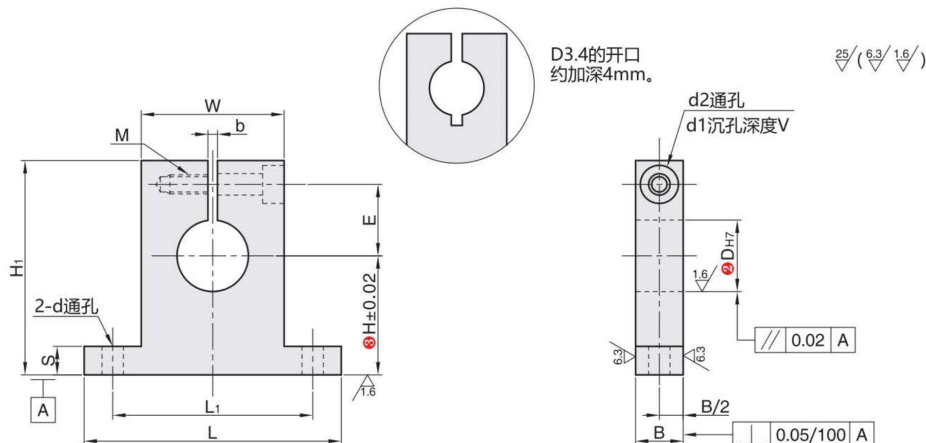

△ 棱边倒钝C0.5

△ 安装孔D按公差H7加工后,进行开口加工。有可能因加工增至H8左右。

型式		H 高度选择	L	H ₁	B	S	W	L ₁	d	E	d ₂	d ₁	V	b	M 紧固螺栓												
①系列码	②D																										
GK20BF GK20BN GK20BU GK20BW GK20BB	3	10 15 20	26	H + 11	8	4	10	18	3.5	7	3.5	6.5	3.5	1.5	M3通孔												
	4	10 15 20		H + 12						8																	
	5	10 15 20 25								H + 16						11											
	6	10 15 20 25	42	10	6	18	30	4.5	8		4.5	8	4.5	M4通孔													
	8	10 15 20 25 30 40							H + 18	13																	
	10	10 15 20 25 30								55					H + 20	10	6	30	42	4.5	15	4.5	8	4.5	2	M4深度8	
	12	10 15 20 25 30	H + 26	67	16	8	35	50	6.5		18	6.6	11	6.5													M6通孔
	13	15 20 25 30																									
	15	15 20 25 30	H + 33							100					H + 38	60	80	29	38	14	20	13	M12深度24				
	16	15 20 25 30 40		H + 36	125	H + 51	25	15	75		100	14	38	14										20	13	M12深度24	
	18	20 25 30 40 50 60	H + 38																								125
	20	20 25 30 40 50 60		H + 36						125					H + 51	25	15	75	100	14	38	14	20				
	25	20 25 30 40 50 60	H + 33		125	H + 51	25	15	75		100	14	38	14										20	13	M12深度24	
	30	25 30 40 50 60		H + 38																							125
	35	25 30 40 50 60	H + 36							125					H + 51	25	15	75	100	14	38	14	20				
	40	30 40 50 60 80		H + 38	125	H + 51	25	15	75		100	14	38	14										20	13	M12深度24	
	50	40 50 60 80	H + 36																								125
		H + 38		125						H + 51					25	15	75	100	14	38	14	20	13				
			H + 36		125	H + 51	25	15	75		100	14	38	14										20	13	M12深度24	

选型举例
Sample Order

①系列码	②D	③H
GK20BF	D3	H10
GK20BN	D5	H15