



轴承座组件 单轴承定位式T型 键槽型



系列码		类型	材质			表面处理
高度h选择型	高度h指定型		轴承	轴承座	挡圈	轴承座
CA91AF	CA91BF	键槽型	钢	S45C	弹簧钢	发黑
CA91AN	CA91BA			SUS304	SUS304	喷细砂无电解镀镍
CA91AW	—			A2017	SUS304	喷细砂本色阳极氧化
CA91AU	—		不锈钢	SUS304	SUS304	—

⚠ 由于产品批次不同，发货镀镍产品可能存在喷细砂，不影响尺寸及功能。

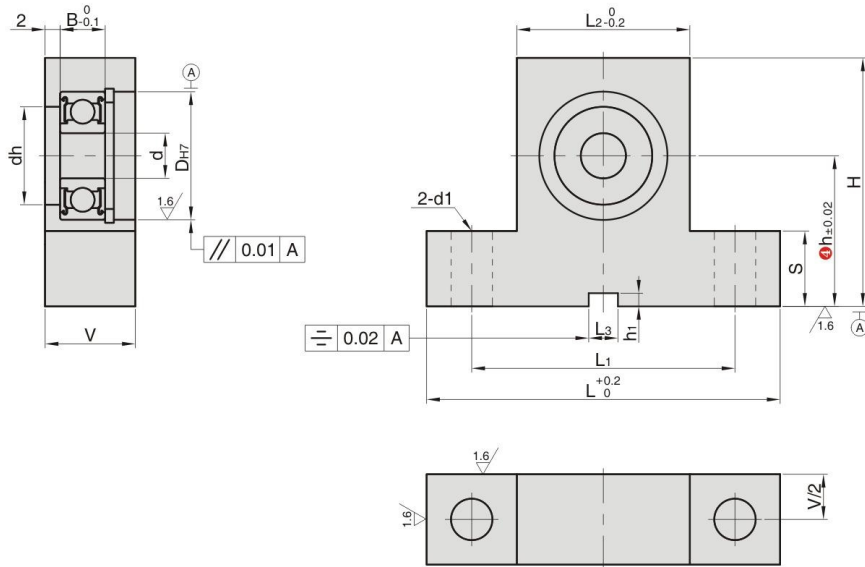

型式		③密封圈	h		d	D _{H7}	dh	B	H	L	L ₁	L ₂	L ₃	V	S	d ₁	h ₁		
①系列码	②轴承型号		高度选择型	高度指定型 单位1mm														公差	公差
高度h选择型	623	ZZ 双盖式	10 15 20 25	10~30	3	10 ^{+0.015 0}	7	4	h+8.8	36	26	16	3	±0.0125	10	4.8	4.5	1.4	
	624				4	13	9	5	h+10.8	38	28	18							
	605				5	14 ^{+0.018 0}	10	6	h+12.8	40	30	20	4	±0.015	12	9.8	5.5	1.8	+0.1 0
	606				6	17	13	6	h+14.8	47	35	23							
	608				8	22	18	7	h+16.8	53	41	29	6	15	5.5	2.8			
	6900				10	22	19	6	h+17.8	60	48	36							
	CA91AF	※VV 非接触式 橡胶密封圈	20 25 30 40	20~40	12	26 ^{+0.021 0}	22	8	h+16.8	58	46	34	8	12	15	6.5	3.3	+0.2 0	
	CA91AN					24	21	6	h+15.8	56	44	32							
	CA91AW					28	24	8	h+17.8	60	48	36							
	CA91AU					28	25	7	h+19.8	68	54	40							
高度h指定型	6001	DD 接触式 橡胶密封圈	25 30 35 40 50	25~50	15	32 ^{+0.025 0}	28	9	h+18.8	64	52	38	10	16	14.8	9	11		
	6902					30	27	7	h+21.8	70	56	43							
	6002				17	35 ^{+0.021 0}	31	10	h+22.8	73	59	45	12	±0.0215	19	19.8	11		
	CA91BF					37 ^{+0.025 0}	34	9	h+24.8	82	66	50							
	6903					41	12	h+27.8	96	76	56								
	6003					48	13	h+31.8	104	84	64								
	CA91BA					55 ^{+0.030 0}	48	13	h+31.8	104	84	64							

⚠ ※VV(非接触式橡胶密封圈)不适用于型号为623、624、605、606的轴承。
⚠ ※VV(非接触式橡胶密封圈)、DD(接触式橡胶密封圈)、轴承材质为钢。

选型举例	①系列码	②轴承型号·③密封圈	④h	追加工
Sample Order	CA91AF	6900ZZ	h20	NA
	CA91BF	6000ZZ	h20	

追加工 代码	增加两侧倒角	增加倒角C2	不装配轴承、挡圈								
	KK	KC	NA								
技术说明	选型方法KK	选型方法KC	选型方法NA								
	 <table><tr><td>d</td><td>KK</td></tr><tr><td>3~8</td><td>5</td></tr><tr><td>10~20</td><td>10</td></tr><tr><td>25~30</td><td>12</td></tr></table>	d	KK	3~8	5	10~20	10	25~30	12		不装配轴承及挡圈 (附带出货)
	d	KK									
3~8	5										
10~20	10										
25~30	12										