


轴承座组件 双轴承法兰型·无挡圈


L尺寸选择型

IHF


L尺寸选择型




圆法兰型



方法兰型



对边法兰型

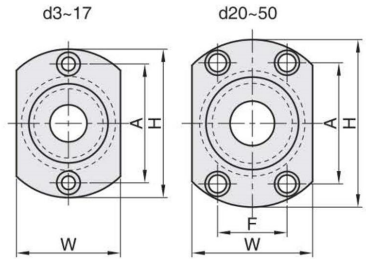

6.3/1.6

系列码			类型	材质		表面处理
圆法兰型	方法兰型	对边法兰型		轴承	固定座	固定座
CA35YF	CA35FF	CA35QF	L尺寸选择型	钢	S45C	发黑
CA35YN	CA35FN	CA35QN				镀镍
CA35YW	CA35FW	CA35QW		不锈钢	A2017	本色阳极
CA35YA	CA35FA	CA35QA				
CA35YU	CA35FU	CA35QU			SUS304	-

型式		①L	d	D _{H7}	公差	B	H	W	V	dh	D ₁₉₇	公差	P.C.D.	K	A	F	d ₁	d ₂	h ₁
①系列码	②轴承型号																		
圆法兰型	623	20 30	3	10	+0.015 0	4	33	16	7	7	14	-0.006 -0.024	24	27	24		6.5	3.5	3.1
	624	20 30	4	13		5	35	18		9	17		26	28	26				
	605	20 30	5	14	+0.018 0	5	36	20		10	18		26	30	26				
	625	25 30	16	16		5	38	22		12	20		28	31	28				
	606	20 35	6	17	+0.021 -0.028	6	39	23		13	21	-0.007 -0.028	29	32	29		8	4.5	4.1
	626	25 35	19	19		6	41	25		15	24		31	34	31				
	678	20 30	12	12	+0.018 0	3.5	34	18		10	16	-0.006 -0.024	25	27	25		6.5	3.5	3.1
	698	25 35	8	19		6	41	25		15	24		31	34	31				
	608	25 35	22	22	+0.021 0	7	45	29		18	27		35	36	35				
	628	25 35	24	24		8	47	32		20	30	-0.007 -0.028	37	37	37				
	6700	20 30	15	15	+0.018 0	4	37	22		12	19	-0.007 -0.028	27	30	27				
	6800	20 30	19	19		5	41	25		15	24		31	34	31				
方法兰型	6900	25 40	10	22	+0.021 0	6	45	29	8	19	27		35	36	35				
	6000	25 40	26	26		8	50	34		22	32	-0.009 -0.034	40	39	40				
	CA35YF	30 40	30	30		9	54	38		24	36		44	42	44	-	8	4.5	4.1
	CA35YN	20 30	18	18	+0.018 0	4	40	25		15	23		30	31	30				
	CA35YW	25 35	21	21		5	44	29		17	26	-0.007 -0.028	34	35	34				
	CA35YA	25 40	12	24	+0.021 0	6	48	31		21	30		38	38	38				
	CA35YU	双盖式	28	28		8	52	36		24	34	-0.009 -0.034	42	40	42				
	6201	30 40	32	32	+0.025 0	10	56	40		26	38	-0.009 -0.034	46	43	46				
	6702	25 35	21	21		4	44	29		18	26	-0.007 -0.028	34	35	34				
	6802	※VV	24	24	+0.021 0	5	47	32		20	30		37	37	37				
	CA35FF	非接触式橡胶	15	28		7	57	37		25	35		45	45	45				
	CA35FN	密封圈	32	32	+0.025 0	9	60	40		28	38		48	46	48		9.5	5.5	5.1
	CA35FW		35	35		11	64	44		29	42		52	49	52				
对边法兰型	6803	DD	26	26	+0.021 0	5	50	34		22	32		40	39	40		8	4.5	4.1
	6903	接触式橡胶	30	30		7	60	38	10	27	36		48	46	48				
	CA35FU	密封圈	35	35	+0.025 0	10	66	44		31	42	-0.009 -0.034	54	50	54		9.5	5.5	5.1
	6203		40	40		12	72	50		34	48		60	54	60				
	CA35QF		27	27	+0.021 0	4	51	35		23	33		41	39	41	25	8	4.5	4.1
	6804		32	32		7	60	40		28	38		48	46	48	29	9.5	5.5	5.1
	CA35QN		20	37		9	69	47		34	45		56	54	56	24			
	6904		42	42		12	77	54		36	50		64	59	64	32			
	CA35QW		47	47	+0.025 0	14	81	58	11	40	54	-0.010 -0.040	68	62	59	34	11	6.6	6.1
	CA35QA		37	37		7	69	47		34	45	-0.009 -0.034	56	54	56	24			
	6805		42	42		9	77	54		36	50	-0.010 -0.040	64	59	64	32			
	6905		25	47		12	88	58		41	54		72	67	63	36			
L尺寸选择型	6205		52	52	+0.030 0	15	94	64		45	60	-0.010 -0.040	78	72	68	39	14	9	8.1
	6806		42	42	+0.025 0	7	77	54		36	50	-0.009 -0.034	64	59	64	32	11	6.6	6.1
	6906		47	47		9	88	58	13	41	54		72	67	63	36			
	6006		55	55		13	96	66		48	62	-0.010 -0.040	80	73	70	40	14	9	8.1
	6206		62	62		16	104	74		55	70		88	79	77	44			
	6007		62	62		14	104	74		55	70		88	79	77	44			
	6207		72	72	+0.030 0	17	126	88	20	64	84	-0.012 -0.047	105	95	92	51	17.5	11	11
	6008		68	68		15	114	82	13	60	78	-0.010 -0.040	96	86	80	54	14	9	8.1
	6208		80	80		18	134	96		74	92		113	102	98	56			
	6010	ZZ	80	80		16	134	96	20	74	92	-0.012 -0.047	113	-	98	56	17.5	11	11
	6210	双盖式	90	90	+0.035 0	20	147	110		83	106		126	-	104	72			

※VV(非接触式橡胶密封圈)不适用于型号为67开始的型号及623、624、605、606的轴承。

选型示例 Sample Order	①系列码	②轴承型号-③密封圈	④L
	CA35YF	626VV	L25
	CA35YF	698ZZ	L35

选型示例 Sample Order	①系列码	②轴承型号-③密封圈	④L	追加加工
	CA35YF	626VV	L25	NA
	CA35YF	698ZZ	L35	NA

追加加工	不装配轴承、挡圈
代码	NA
技术说明	不装配轴承及挡圈 (附带出货)

17
轴承座 轴承