

轴承座组件 单轴承T型

高度h选择型/高度h指定型/高度h指定倒角C型

IHF

单轴承T型




系列码			类型	材质		表面处理
高度h选择型	高度h指定型	高度h指定倒角C型		轴承	固定座	挡圈
CA43GF	CA43HF	CA43JF	T型	钢	S45C	弹簧钢
CA43GN	CA43HN	CA43JN				发黑
CA43GW	CA43HW	CA43JW				镀镍
CA43GA	CA43HA	CA43JA		不锈钢	A2017	SUS304
CA43GU	CA43HU	CA43JU				本色阳极
					SUS304	-

无倒角C型

有倒角C型

$\sqrt{(6.3/1.6)}$

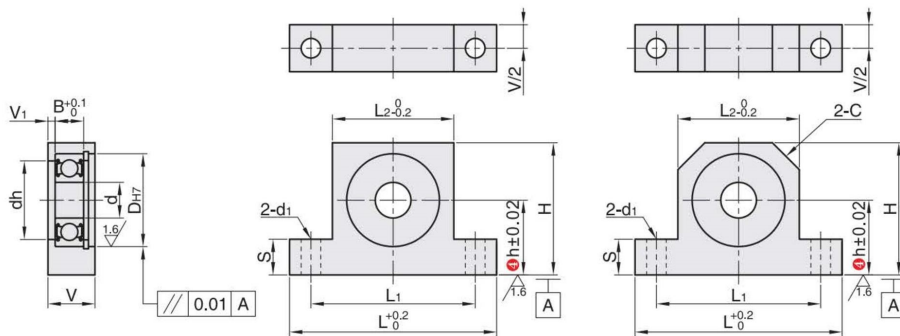

型式		⑥密封圈	④h		d	D _{H7}	公差	dh	B	V ₁	H	L	L ₁	L ₂	V	S	C	d ₁
①系列码	②轴承型号		高度选择型	高度指定型 单位1mm														
高度h选择型	623	ZZ 双盖式	15 20 25	10 ~ 30	3	10	+0.015 0	7	4		h+9	36	26	16				
	624				4	13		9			h+11	38	28	18	10	5		4.5
	605				5	14	+0.018 0	10	5		h+12	40	30	20				
	625					16		12			h+13	46	34	22				
	606				6	17	+0.021 0	13	6		h+14	47	35	23	12		5	
	626					19		15			h+14	49	37	25				
	698					19		16	6		h+14	49	37	25	11			
	608				8	22	+0.021 0	18	7		h+15	53	41	29	12			
	628					24		20	8		h+16	56	44	32	15			
	6800					19		16	5		h+14	50	38	26	10			
高度h指定型	CA43GF	※VV 非接触式橡胶 密封圈	20 30 40	15 ~ 40	10	22	+0.021 0	19	6		h+15	53	41	29	12	10		5.5
	CA43GN					26		22	8		h+17	58	46	34	15			
	CA43GW					30		24	9		h+19	62	50	38				
	CA43GA					21		18	5		h+15	53	41	29	10			
	CA43GU					24	+0.021 0	21	6		h+16	56	44	32	12			
	6901				12	28		24	8		h+18	60	48	36	15			
	6001					32	+0.025 0	26	10		h+20	64	52	40	16			
	CA43HF					24	+0.021 0	21	5		h+16	56	44	32	10			
	CA43HN				15	28		25	7	2	h+18	60	48	36	12			
	CA43HW					32	+0.025 0	28	9		h+20	68	54	40	15		10	
高度h指定倒角C型	CA43JF	DD 接触式橡胶 密封圈	30 40 50	25 ~ 50		35	+0.021 0	29	11		h+22	72	58	44	16			
	CA43JN					30		27	7		h+19	64	52	38	13			
	CA43JW				17	35	+0.025 0	31	10		h+22	70	56	43	16			6.5
	CA43JA					40		34	12		h+24	76	62	49	19			
	CA43JU					32		29	7		h+20	68	53	40	13	15		
	6804				20	37		34	9		h+23	73	59	45	15			
	6204					42	+0.025 0	36	12		h+25	82	66	50	19			
	CA43JF					47		40	14		h+28	88	72	56				
	CA43JN					37		34	7		h+23	82	64	46	13			9
	CA43JW				25	42		39	9		h+25	91	69	51	15			
高度h指定倒角C型	CA43JA		40 50 60	30 ~ 60		47		41	12		h+28	96	76	56	19			
	CA43JU					52	+0.030 0	45	15		h+31	102	82	62	22			
	6205					42		39	7		h+25	91	71	51	14			
	6806					47	+0.025 0	44	9		h+28	96	76	56	16	20	12	11
	CA43GF				30	55		48	13		h+32	104	84	64	19			
	CA43GN					62		55	16		h+36	112	92	72	22			
	CA43GW					62		55	14		h+36	112	92	72	21	20	12	11
	CA43GA					72	+0.030 0	64	17		h+44	148	118	88	26	25	15	13
	CA43HA				35	68		60	15	3	h+41	122	102	82	24	20	12	11
	CA43HU				40	80		74	18		h+50	160	130	100	27	25	15	13

△※VV(非接触式橡胶密封圈)不适用于型号为623、624、605、606的轴承。

选型举例	①系列码	②轴承型号	③密封圈	④h	⑤追加加工
Sample Order	CA43GF	626VV	h20	-	-
	CA43GF	698ZZ	h25	-	NA

追加加工	不装配轴承、挡圈	增加倒角C2
代码	NA	KC
选型方法	选型方法NA	选型方法KC
技术说明	不装配轴承及挡圈 (附带出货)	